


## Eagle Axiom® Casement Window Sizes

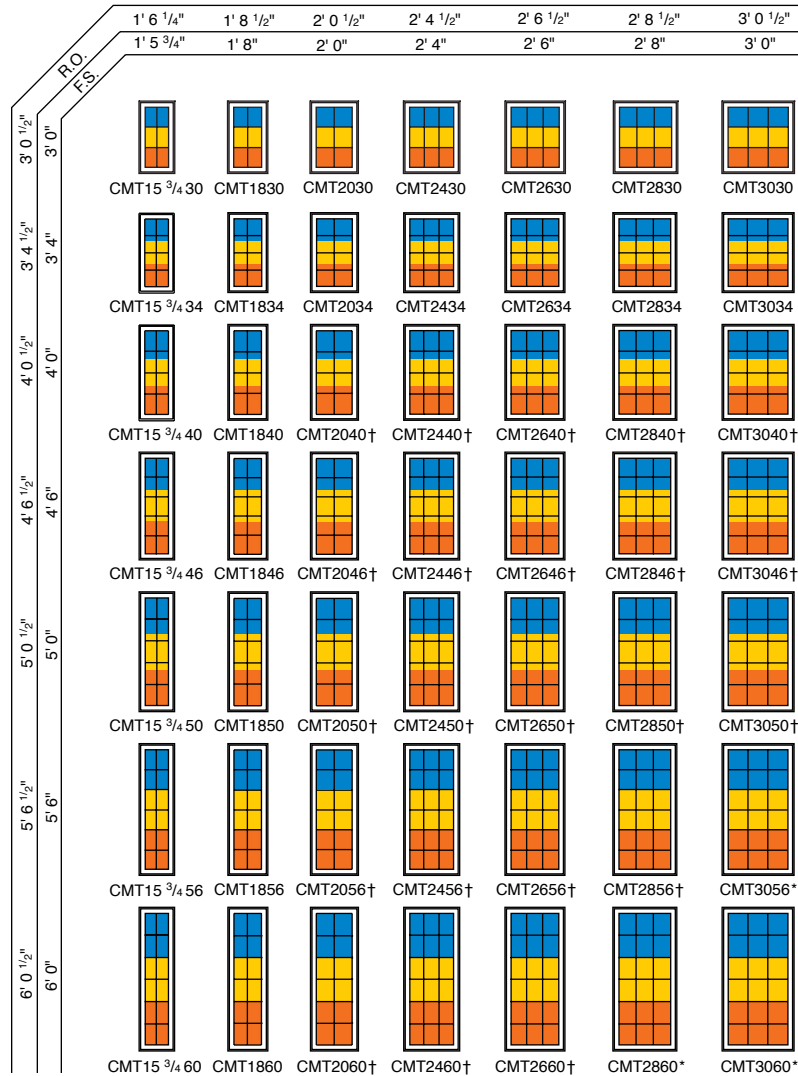

### Notes:

The sizes shown are our standard call sizes. Additional custom sizes are also available. Contact your Eagle dealer for more information.

Local building codes may differ. Verify egress conformance with your local building code official.

† These units meet or exceed the following dimensions: clear opening area of 5.7 sq. ft., clear opening width of 20" and clear opening height of 24".

\* A sash-limiting device is standard.


Our website also contains egress information.

Visit [EagleWindow.com](http://EagleWindow.com) for details on mulling performance in our Engineered Evaluations.

- HarborMaster IG - ASTM Certified
- HarborMaster Monolithic - ASTM Certified
- HarborMaster Monolithic - TAS Certified

Scale 1/8" = 1'0"

## Eagle Axiom Casement 1-Piece Picture Window Sizes

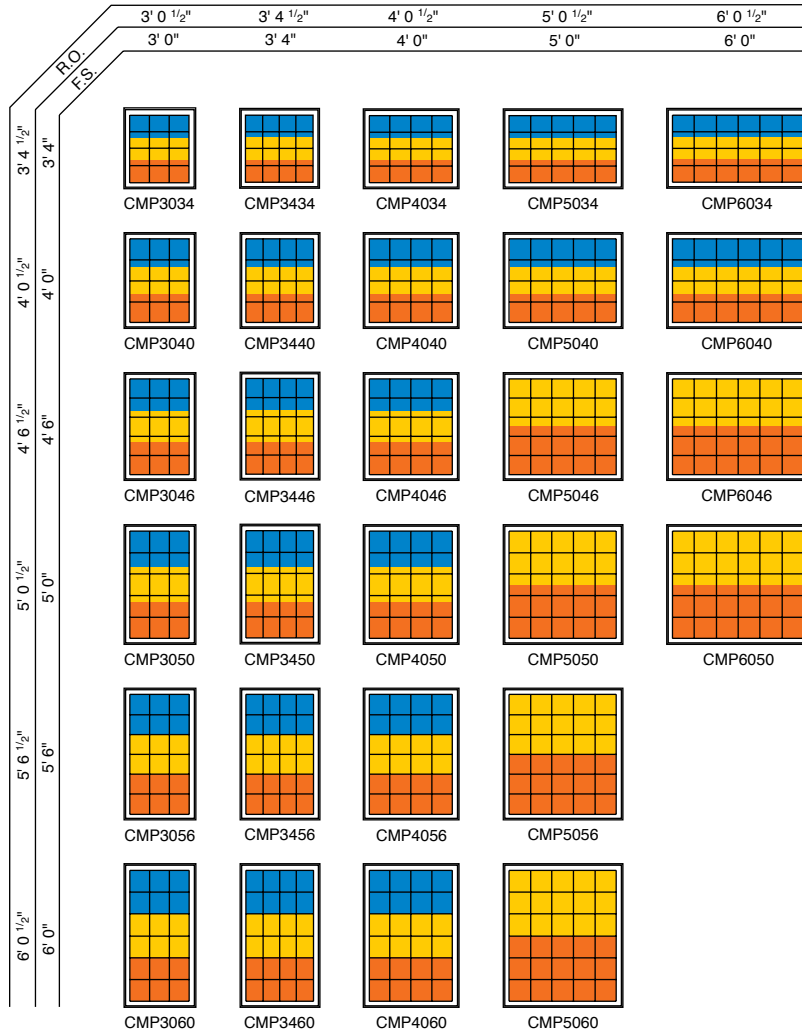

**Notes:**

The sizes shown are our standard call sizes. Additional custom sizes are also available. Contact your Eagle dealer for more information.

Visit EagleWindow.com for details on mulling performance in our Engineered Evaluations.




One-piece casement fixed units only.

Rectangular, radius and geometrics are certified.


Minimum size for fixed casements is 12"x12".

Maximum size for HarborMaster™ system with monolithic glass is 5'0 x 8'0 or 8'0 x 5'0.

Maximum size for HarborMaster system with insulated glass is 4'0 x 6'0 or 6'0 x 4'0.


-  HarborMaster IG - ASTM Certified
-  HarborMaster Monolithic - ASTM Certified
-  HarborMaster Monolithic - TAS Certified

## Eagle Axiom Casement 1-Piece Transom Window Sizes

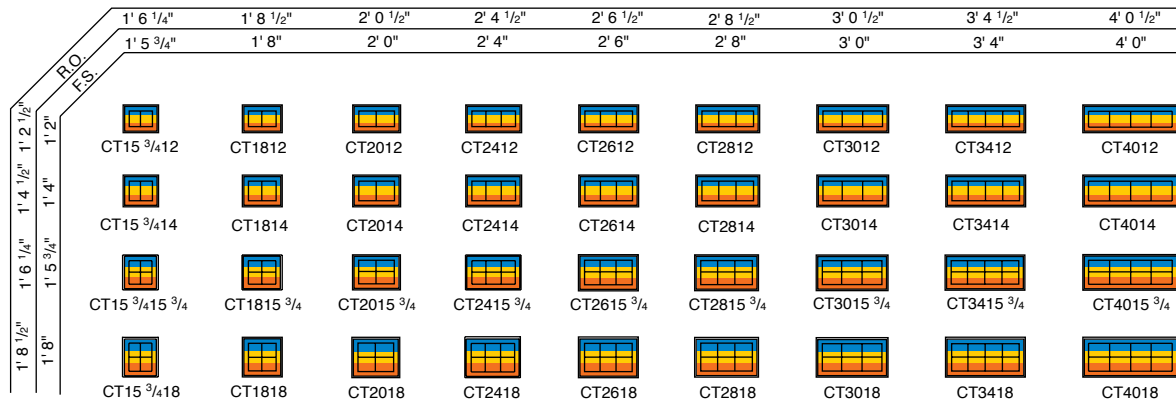

Scale 1/8" = 1'0"

## Eagle Axiom® Radius Casement Window Sizes

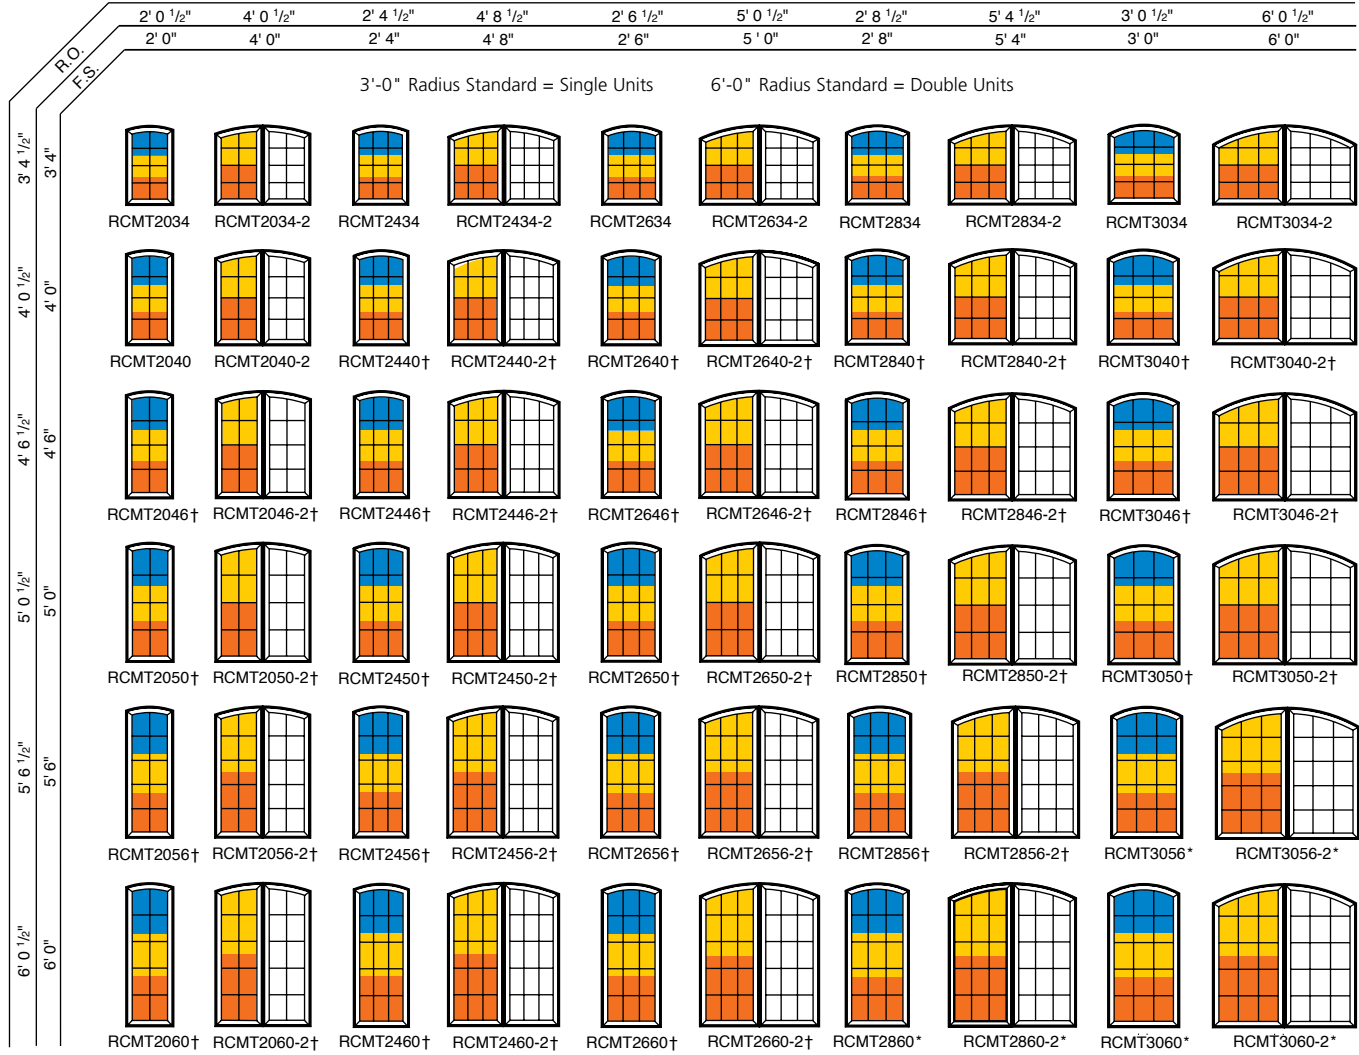

**Notes:**

The sizes shown are our standard call sizes. Additional custom sizes are also available. Contact your Eagle dealer for more information.

Local building codes may differ. Verify egress conformance with your local building code official.

† These units meet or exceed the following dimensions: clear opening area of 5.7 sq. ft., clear opening width of 20" and clear opening height of 24".

\* A sash-limiting device is standard.

Our website also contains egress information.

Two-wide units can be certified with 2" LVL structural mullions only.

Visit [EagleWindow.com](http://EagleWindow.com) for details on mulling performance in our Engineered Evaluations.

- HarborMaster IG - ASTM Certified
- HarborMaster Monolithic - ASTM Certified
- HarborMaster Monolithic - TAS Certified

Scale 1/8" = 1'0"